




INSTALLATION INSTRUCTIONS FOR Part 15673-176BSL GL1500 Lighted Rotor Covers with Strip Light

Note: Read instructions thoroughly before installing.

1. Place bike on center stand.
2. Remove the front fender side cover by first pulling the center boss out of the fender rubber hole and then releasing the two mounting tables. Repeat on the other side. Figure 1 and 2.

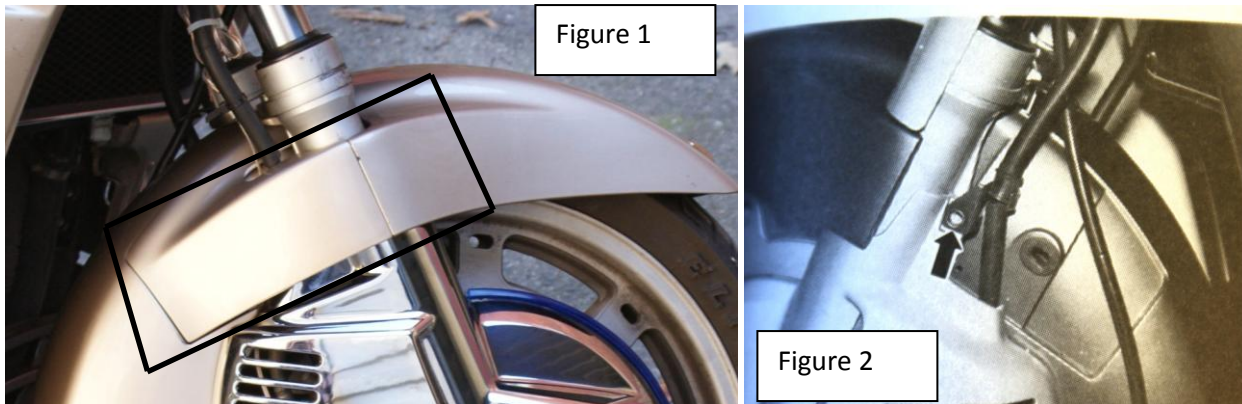

3. Remove the two lower disc cover mounting bolts and collars. Figure 3.
4. Remove the upper disc cover mounting bolt. Figure 2.



5. Put on the new rotor cover using the original bolts. Replace in reverse order.

LIGHTING INSTALLATION- before installing rotor covers:

1. Check lights with tester to insure they are working properly.
2. Clean the edges of the rotor covers with contact cleaner to remove all grease and dirt.
3. Starting at the top of the cover working downward. Install the double sided adhesive strip. After it is installed peel the front mask of the double sided tape. Install the strip lights with the wire facing down.
4. Run the wire under the bottom of the rotor cover up to the power source. Make sure the wire does not interfere with the brakes or other moving parts.
5. Repeat the procedure with the other side.
6. Wire lights with power to running lights or accessory switch and the other to the ground. Test light for proper operation.