



Installation Instructions for Side Emitting LED Strip Lights

335A48-Amber

335PP48-Pink

335B48-Blue

335R48-Red

335G48-Green

335W48-White

Parts:

- 2- Side emitting flex Led lights
- 4- Male spade connectors
- 4- T-tap connectors
- 1- Alcohol prep swab

NOTE: Read all instructions thoroughly prior to starting.

WIRING: Red-Power
Black-Ground

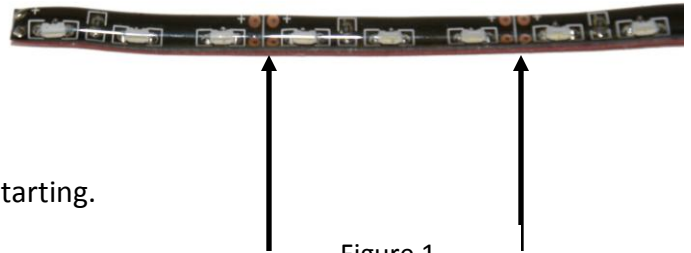


Figure 1

NOTE: Prior to installation connect light to battery and check for proper operation. Light is emitted from the side with LED closest to the edge.

NOTE: Light may be cut to size. Cut along line between copper colored dots marked with (+) symbol. Seal end with silicone after cut. **Figure 1**

1. Clean the mounting area with alcohol prep swab.
2. Remove red backing paper from two sided tape on back of light. Apply light at desired location and press lightly onto the bike.
3. Connect red wire to desired power source, such as running, brake, or turn signal circuit.
4. Connect Black Wire to proper ground.
5. Test for proper operation.