



Mounting Instructions for Part 45-1205-L GL1800 Windshield Panel Light

Note: Read instructions thoroughly before installing.

1. Place bike on center stand.
2. Remove the following per manual instructions.

- A. Rear view Mirror (Figure 1)
 - Remove the meter panel.
 - Remove the trim clip, screw and mirror cover.
 - Remove the three screws, bracket and mirror.
 - Disconnect the turn signal light 3P connector.

- B. Windshield Garnish (Figure 2)
 - Remove the left and right rearview mirrors per above instructions.
 - Remove the two bolts, washers and mounting rubbers.
 - Release the four bosses from the grommets and remove the windshield garnish.

3. Line up the windshield panel light in the windshield vent opening as shown in Figure 3. Mark spots for final application.

4. Remove tape backing and carefully apply light at pre-marked spots.

5. Splice wires to mirror light as follows:
 - Black to Ground
 - Red to Orange/White wire to left mirror.

6. Reassemble all parts in reverse order.

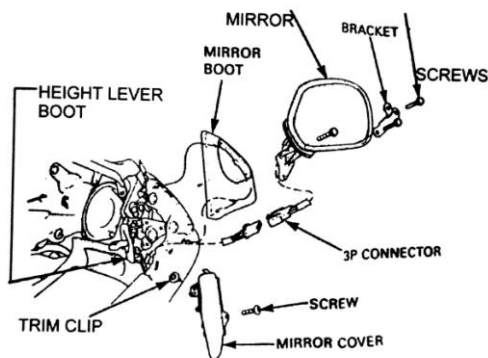


Figure 1

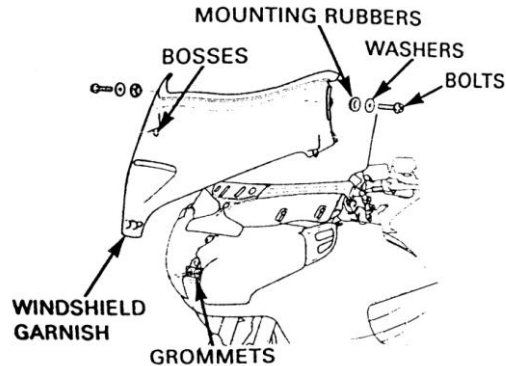


Figure 2



Figure 3



Complete

