



**MOUNTING INSTRUCTIONS**  
**For 45-1222H/45-1222RBH**  
**GL 1800 FRONT FAIRING HALO**

NOTE: Read instructions thoroughly before installing. Drilling required.

1. Place bike on center stand.
2. Remove the windshield panel in accordance with manual directions.
3. Remove the front fairing garnish by removing the setting bolt at the top and setting screws on the bottom. Photo 1 and 2.
4. **Application for 2001-2005.** Center the light halo on to the front fairing garnish as shown in photo 3A. Mark drill positions on fairing garnish.
  - a. Drill a 75/1000 inch hole in front fairing garnish where marked with a #48 drill. Attach fairing halo with 2 of the 4 screws provided.
  - b. Reattach front fairing garnish with halo temporarily to measure drill positions for holes on the fairing liner using the fairing halo as a guide. Photo 4, 5 & 6
  - c. Drill a 75/1000 inch hole in front fairing liner where marked using a #48 drill.
  - d. Attach entire fairing front garnish with fairing halo with screws provided and tighten screws securely into place.
5. **Application for 2006-2013.** Center the light halo on to the front fairing garnish as shown in photo 3B. Mark drill positions on fairing garnish.
  - a. Drill a 75/1000 inch hole in front fairing garnish where marked with a #48 drill. Attach fairing halo with 2 of the 4 screws provided. Your will not need two remaining screws.
  - b. Reattach front fairing garnish with halo. Photo 7.
  - c. Carefully align the adhesive pads so the ends of halo can be secured to the rear inside fairing near the forks. Clean the area before the adhesive pads are put in place.
6. Wire into running lights. Attach the green wire to the positive and the black wire to the ground.




Photo 1




Photo 2



Photo 3A



Photo 4



Photo 5



Photo 6

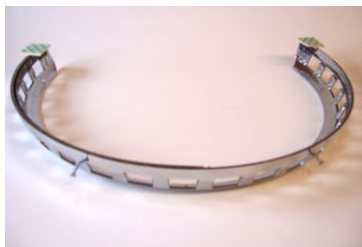


Photo 3B



Photo 7



Attach adhesive pads towards rear of front fairing.



Complete