



Installation Instructions

Part 15673-126

GL1500 Fairing Marker Light

NOTE: Read Instruction carefully before installation.

1. Place bike on center stand
2. Remove the following:
 - a. Using the flat blade screwdriver, pry off the left and right black plastic upper side trim pieces (1A) from the L/R fairing panel covers (1B). Note: each side has one large and one small trim piece to be removed. Set aside.
 - b. Using the #2 Phillips screwdriver, remove the 3 screws (1C) from the L/R lower fairing panel covers (1B). Set aside.
3. Install the L/R grills (2A) using the 5mm x 30mm screws (2B), with the spacers (2D) & (2G) furnished, behind the grills. The four short spacers (2D) are used in conjunction with the screws nearest to the slotted end (2E) and the two long spacers (2G) are used at the front end of the fairing.

Figure 1

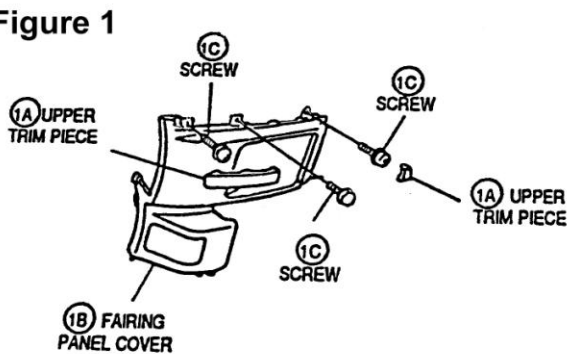


Figure 2

