




MOUNTING INSTRUCTION FOR PART NUMBER 45-1231

GL1800 LED LIGHTED FRONT FENDER EAGLE

Note: Read instruction thoroughly before installing. Drilling required.

1. Place bike on center stand.
2. Remove front fender.
3. Measure from the tip of the front fender towards the bike 3 inches and mark.

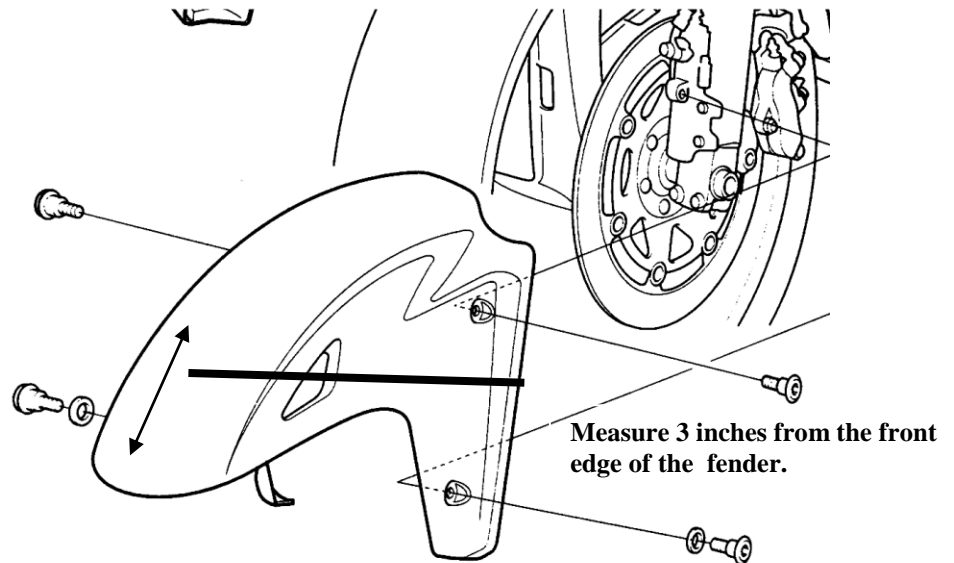

4. Center eagle on fender and mark fender for drill location under the eagle head.
5. Drill a 1/8" hole.
6. Clean area.
7. Put the light wires through the hole and secure the wires to inside of fender so wires will not touch any moving parts.
8. Remove the tape covering from the light and press on firmly.
9. Replace fender. Attach the black wire to ground and red wire to a running light.



email: info@addonaccessories.net