



Installation Instructions For Part 45-1823 Red LED Auxiliary Running or Brake Light

NOTE: Read Instructions carefully before installing. This is a running **or** brake light. Prior to installation, test light by connecting red wire to positive battery terminal and black wire to ground. Fits on all GL1800s.

CAUTION: Disconnect the battery ground prior to wire connections.

Installation:

1. Locate the center lower edge of the trunk.
2. Clean desired location for the light with alcohol prep swab.
3. Clean flexible strip light with alcohol prep swab.
4. Apply two sided tape to either flat side of the light. **Figure 1**
5. Align and press onto the desired location on underside of trunk. Press light to trunk for one minute. **Figure 2**

WIRING:

1. Run red wire to desired harness, brake **or** running and attach with quick wire tap provided.
2. Run black wire to ground and attach with ring terminal on the quick wire tap provided.
3. Test light.



Figure 1



Figure 2

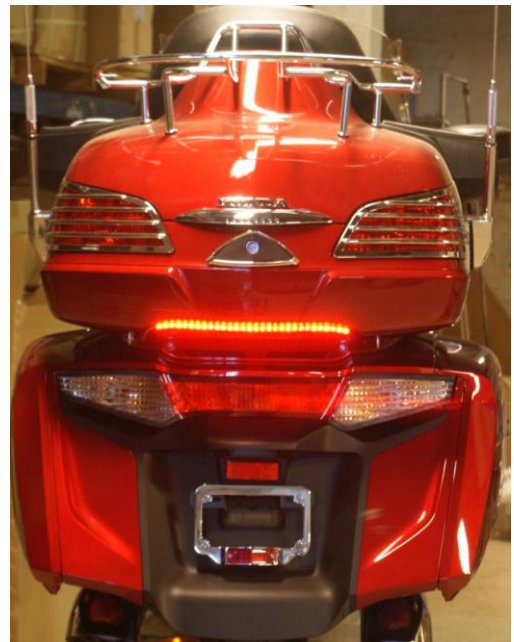


Figure 3