




INSTALLATION INSTRUCTIONS

For BP-1

GL1500 TWO PIECE ENGINE PLATE

1. Place motorcycle on center stand.
2. Loosen the three (3) 10mm nuts on each side of the exhaust shields on both sides.
3. Insert the front end of the plate into the bottom of the front spoiler. Align the notches on the sides with the loosened nuts. Pull the vent tube through the hole in the plate.
4. Slide the plate under the shields, one side at a time. Push the plate up against the bottom of the engine. Install the clamps in the plate and around the exhaust pipe.
5. Tighten all bolts and nuts.

NOTE: When changing the oil, remove the three front screws to get access to the oil filter.

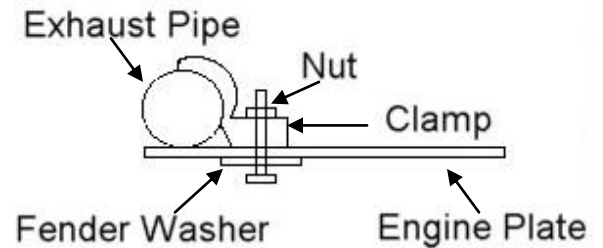

133 Gold St, Worcester, MA 01608 508-791-7552 800-821-9861 fax 508-793-2919
Email: info@addonaccessories.net